

# PRO10-35 HIGH PRESSURE RESISTANCE SPIRAL-WOUND RO MEMBRANE ELEMENT

## Performance Characteristics

The chemical property of membrane sheet and structural material of membrane element used for PRO10-35 high pressure resistance RO membrane elements that are suitable for the application of terminal waste water treatment, such as continuing to reduce the COD and total dissolved solids of second-level and third-level waste water treatment. PRO10 membrane is specially designed for the relatively higher content of suspended solids, featuring large flux, under the same conditions, 20% more water can be produced compared with the other high pressure RO membrane element, which is suitable for high concentration material concentration.

## Membrane Specifications

### Parameters of Membrane Element


Model	Average Flow Rate gpd(m <sup>3</sup> /d)	Average Salt Rejection %	Test Conditions
PRO10-35	12800 (48.3)	99.0%	1

**Notes:** Average salt rejection is tested after 24 hours operation. Fluctuation range of single membrane flow rate could be ±25%.

**Test condition 1:** 2,000ppm NaCl solution, 225 psi operating pressure, 25°C temperature, pH7, 15% recovery rate.

## Schematic Diagram and Dimensions

Figure 1

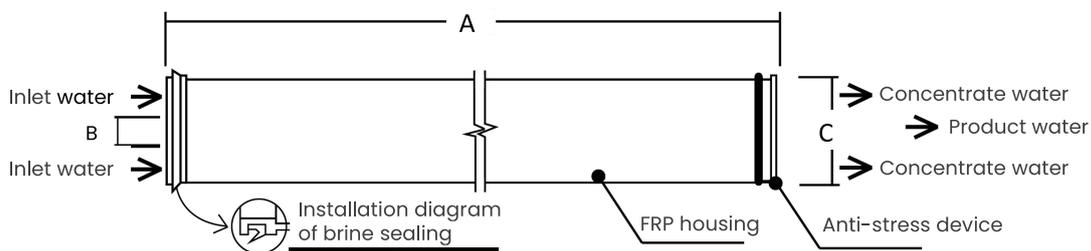

Product model	Connector	Diameter, inch (cm)			Weight (KG)
		A	B	C	
8040	Flat connector	40.00 (101.6)	1.125 (2.85)	7.9 (20.1)	16

## Operating Conditions

Product model	PRO10-35
Max. operating pressure	1200psi
Typical operating pressure	225psi
Pressure drop of single membrane element	<12psi
Recovery rate	15%
Max. operating temperature	50°C
Max. cleaning temperature	50°C
Continuous working PH range	4.0-11.0
Cleaning PH range	2.0-11.5
Max. allowable residual chlorine	500 ppm-h
Inlet water	NTU <1, SDI < 5

## Storage Conditions

- Before the first use, all membrane elements must be stored under the original packaging conditions.
- The transport temperature below 0°C may cause irreversible membrane damage, on the contrary, above 30°C may cause membrane degradation and deterioration of the protection solution.
- Store in a cool, dry condition and the place where is not directly exposed to sunlight. Storage temperature is kept between 0°C to 30°C, and the longest storage time is 6 months.

## General Information

- Once wetted, the membrane element must always be wet.
- The limited warranty we promised will expire due to the fact that the user does not strictly follow the operational restrictions and guidelines set forth in this Code.
- If the system is in a shut down state for a long time, the membrane element is advised to be placed in the protective solution to prevent the growth of microorganisms.
- If the user uses incompatible chemicals and lubricants to cause improper influence on the membrane elements, the user shall bear the corresponding responsibilities.
- The maximum allowable pressure drop of single pressure vessel is 60 psi (4.1bar).
- At no time can the back pressure be produced on the side of producing water to avoid the occurrence of bad problems.