

# SES30-400 ULTRALOW PRESSURE AND LARGE FLUX REVERSE OSMOSIS MEMBRANE ELEMENT

## Performance Characteristics

SES30-400 is an energy-saving composite reverse osmosis membrane with ultralow pressure & large flux. It guarantees the high desalination rate of the system, and provides customers with the best comprehensive system performance and the most economical operation cost under very low pressure.

## Membrane Specifications

### Parameters of Membrane Element


Model	Average Flow Rate gpd(m <sup>3</sup> /d)	Average Salt Rejection %	Test Conditions
SES30-400	9700 (36.6)	99.0%	1

**Notes:** Average salt rejection is tested after 24 hours operation. Fluctuation range of single membrane flow rate could be  $\pm 25\%$ .

**Test condition 1:** 500ppm NaCl solution, 100psi operating pressure, 25°C temperature, pH7, 15% recovery rate.

## Schematic Diagram and Dimensions

Figure 1

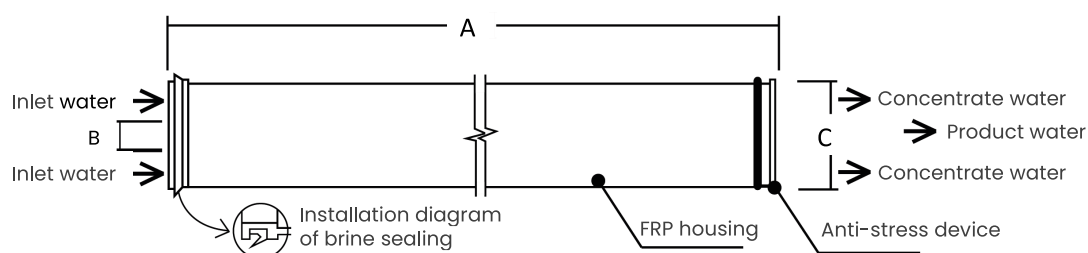

Product model	Connector	Diameter, inch (cm)			Weight (KG)
		A	B	C	
8040	Flat connector	40.00 (101.6)	1.125 (2.85)	7.9 (20.1)	16

## Operating Conditions

Product model	SES30-400
Max. operating pressure	600psi
Typical operating pressure	225psi
Pressure drop of single membrane element	<12psi
Recovery rate	15%
Max. operating temperature	50°C
Max. cleaning temperature	50°C
Continuous working PH range	4.0-11.0
Cleaning PH range	2.0-11.5
Max. allowable residual chlorine	500ppm-h
Inlet water	NTU<1, SDI<5

## Storage Conditions

- ☑ Before the first use, all membrane elements must be stored under the original packaging conditions.
- ☑ The transport temperature below 0°C may cause irreversible membrane damage, on the contrary, above 30°C may cause membrane degradation and deterioration of the protection solution.
- ☑ Store in a cool, dry condition and the place where is not directly exposed to sunlight. Storage temperature is kept between 0°C to 30°C, and the longest storage time is 6 months.

## General Information

- ☑ Once wetted, the membrane element must always be wet.
- ☑ The limited warranty we promised will expire due to the fact that the user does not strictly follow the operational restrictions and guidelines set forth in this Code.
- ☑ If the system is in a shut down state for a long time, the membrane element is advised to be placed in the protective solution to prevent the growth of microorganisms.
- ☑ If the user uses incompatible chemicals and lubricants to cause improper influence on the membrane elements, the user shall bear the corresponding responsibilities.
- ☑ The maximum allowable pressure drop of single pressure vessel is 60 psi (4.1bar).
- ☑ At no time can the back pressure be produced on the side of producing water to avoid the occurrence of bad problems.